



1931

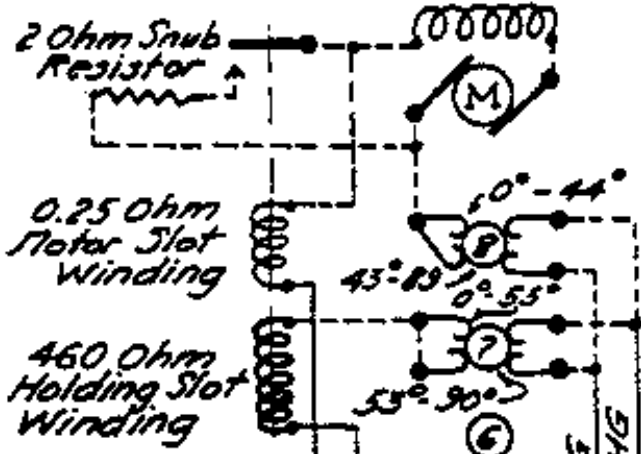

Extra Circuit Controllers	
Contact	Cam
6	0°-45°
5	0°
4	Blank
3	45° P.C.
2	45° P.C.

The 43-89° Contact #8 should open at 89° just before contact #1 opens.

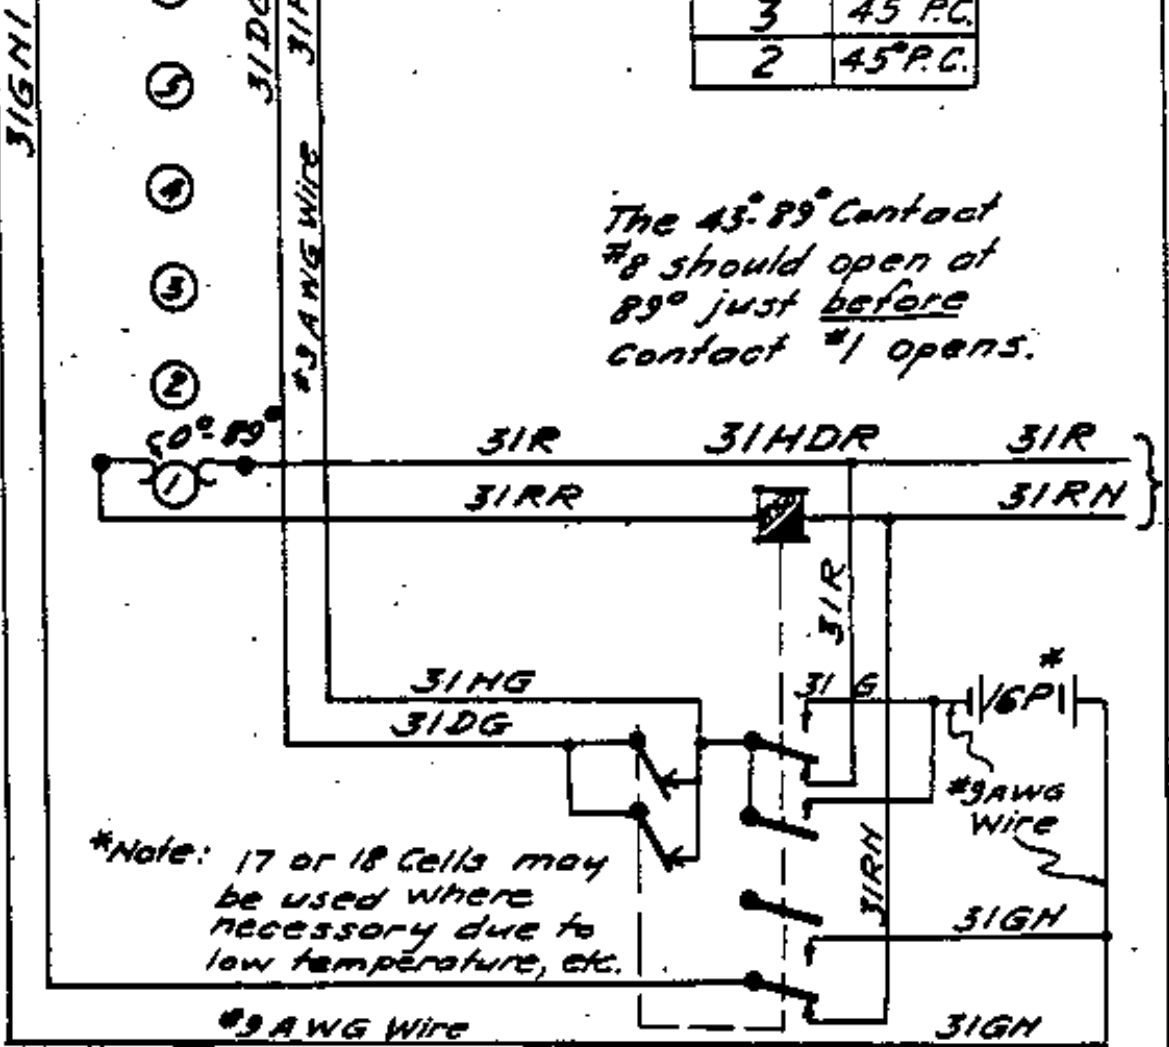

\*Note: 17 or 18 Cells may be used where necessary due to low temperature, etc.

**LOCAL WIRING for 3 POS. STYLE T2 SIGNAL WITH POLARIZED CONTROL**  
(for 2-Pos Wiring see SES 40)

Approved: *John S. Sturges*  
Signal Engr System.  
Topoka Jan 30-1932

Revised 4-21-36

SES-37