


1931

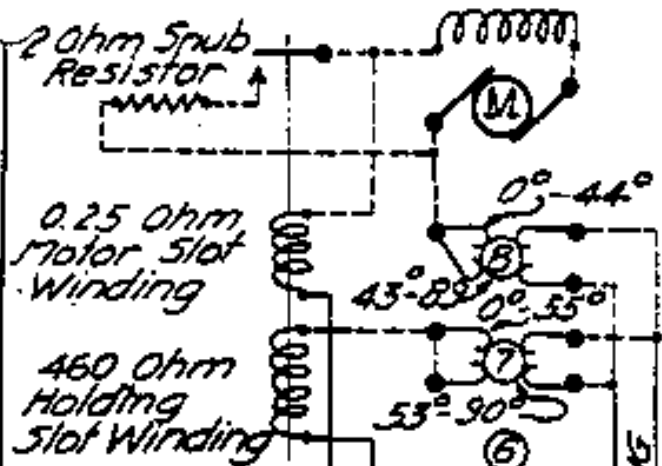


Extra Circuit Controllers	
Contact Cam	
6	0°-45°
5	0°
4	Blank
3	45° P.C.
2	45° P.C.

Generally required only where more than three Restricted Speed Indications are provided.

31GN
31GN1

31DG
#9 A.W.G. WIRE 31HG

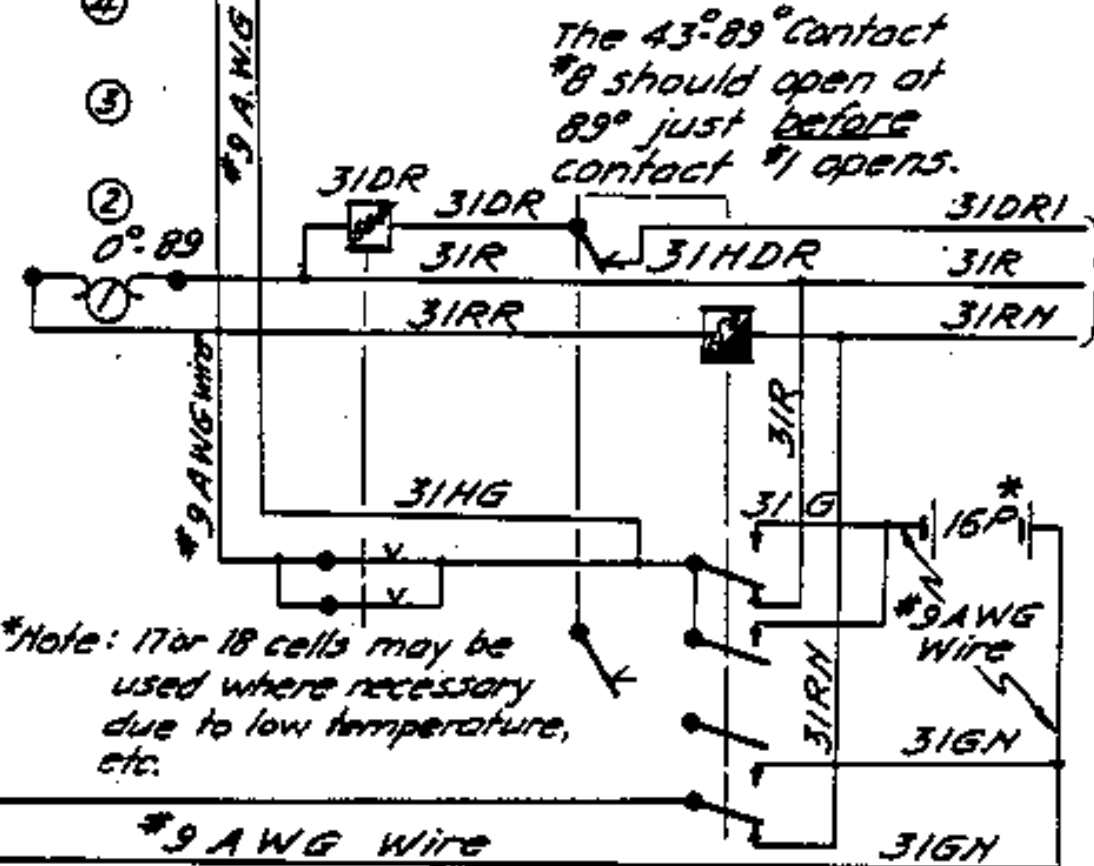

The 43°-89° Contact #8 should open at 89° just before contact #1 opens.

*Note: 17 or 18 cells may be used where necessary due to low temperature, etc.

LOCAL WIRING for 3 POS. STYLE T2 SIGNAL WITH POLARIZED CONTROL FOR Use at Special Locations as Specified on Plan.

Approved *[Signature]*

Signal Eng. System
Topeka, Kan 3-1937 SES-37C