



1931

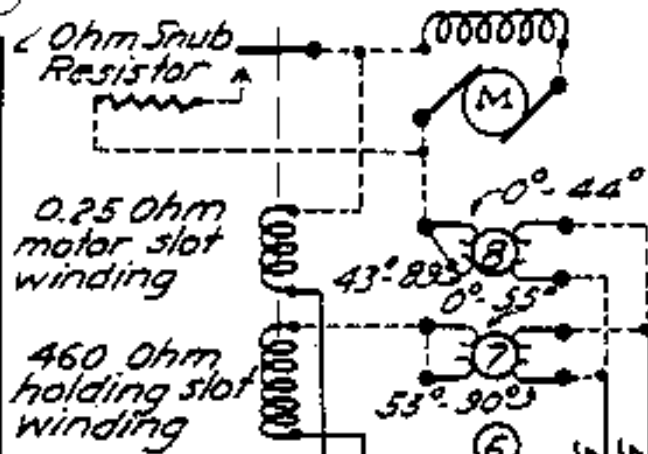

The 43°-89° contact #8 should open at 89° just before contact #1 opens.

Extra Circuit Controllers	
Contact	Com
6	0°-45°
5	0°
4	Blank
3	45° P.C.
2	45° P.C.

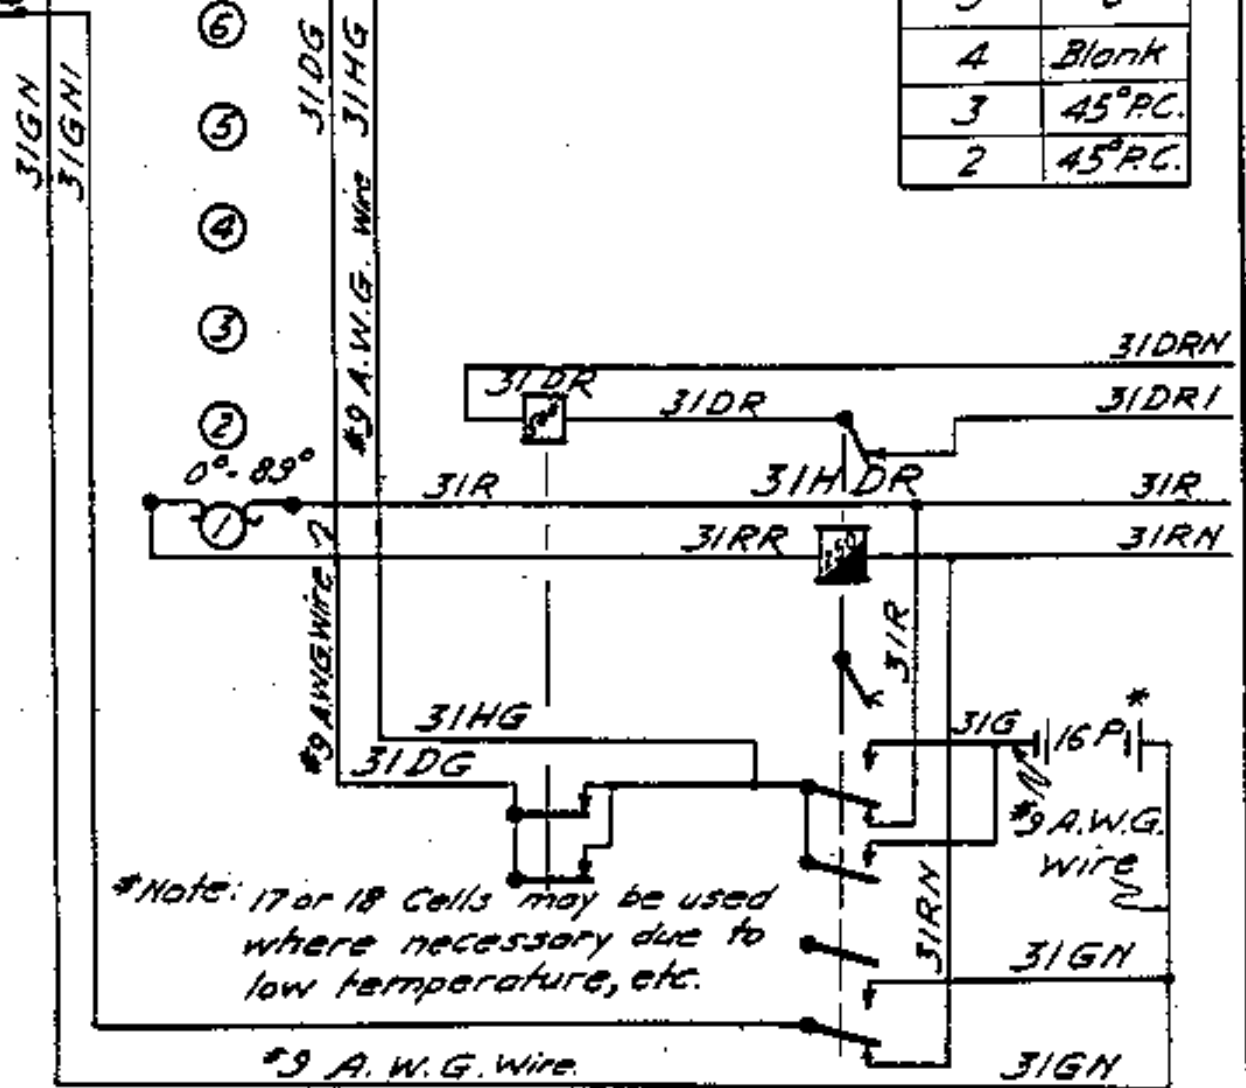

*Note: 17 or 18 Cells may be used where necessary due to low temperature, etc.

#9 A. W. G. Wire.

LOCAL WIRING for 3 POS. STYLE T2 SIGNAL WITH POLARIZED CONTROL FOR ADDITIONAL RESTRICTIVE INDICATION
 Approved *[Signature]* **4-WIRE CIRCUIT**
 Signal Engr. System
 Topeka 8-8-38 **SES-37D**